

THERMOSPAN INSULATED PANELS (GREATER THAN 2.5 kPa DESIGN WIND LOADS)

PURPOSE

Metalcraft Insulated Panel Systems supplies ThermoSpan Insulated Panels for use as load bearing and non-load bearing roofing panels, for conditions where design wind loads greater than 2.5 kPa apply.

EXPLANATION

ThermoSpan Insulated Panels are lightweight, thermally efficient, and supplied with ancillary components, necessary for installation.

They are fully finished internal/external panels manufactured from a core of expanded polystyrene (EPS) sandwiched between 0.59 mm layers of Colorsteel®. The panels have a material group number of 1S.

The panels are available in a variety of colours and in the following thicknesses (mm):

50, 75, 100, 150, 200, 250, 300.

ThermoSpan panels are supplied in a variety of profiles, and the weathertightness of the connection relies on a lapped corrugation.




For further assistance please contact:

+64 9 277 8844
peter.z@metpanels.co.nz
metalcraftgroup.co.nz



SCOPE AND LIMITATIONS OF USE

Scope	Limitations
Location Up to a design wind pressure (ULS) of 4.3 kPa. In all corrosion zones as defined in NZS 3604:2011. Any distance from a relevant boundary.	<ul style="list-style-type: none"> ➤ Should not be installed within 50 m of breaking surf. ➤ Where the system is to be used in a micro-climate (as defined in para 4.2.4 NZS 3604:2011), Metalcraft Insulated Panel Systems is to be consulted. ➤ The panels may only be installed within 1 m of a relevant boundary where an unprotected area is permitted. ➤ The design must be in accordance with Acceptable Solution C/AS2.
Building In new buildings where the relevant part of the building complies with the NZ Building Code or in the existing buildings where the designer and installer have assured themselves that the relevant part of the building is adequate for the intended building work. Any building height up to a maximum design differential wind pressure of 4.3 kPa.	<ul style="list-style-type: none"> ➤ Where the building has a building height greater than 10 m and upper floors contain sleeping uses or other property, then the external wall must be subject to specific fire engineering design in respect of vertical spread of flame.
With a minimum roof pitch of 3°.	<ul style="list-style-type: none"> ➤ Must be fixed with 14 g tek screws (or equivalent) at each rib.
With joinery that complies with the Building Code.	<ul style="list-style-type: none"> ➤ Where the design differential wind pressure exceeds 2.5 kPa the joinery and weathertight details are subject to specific design.

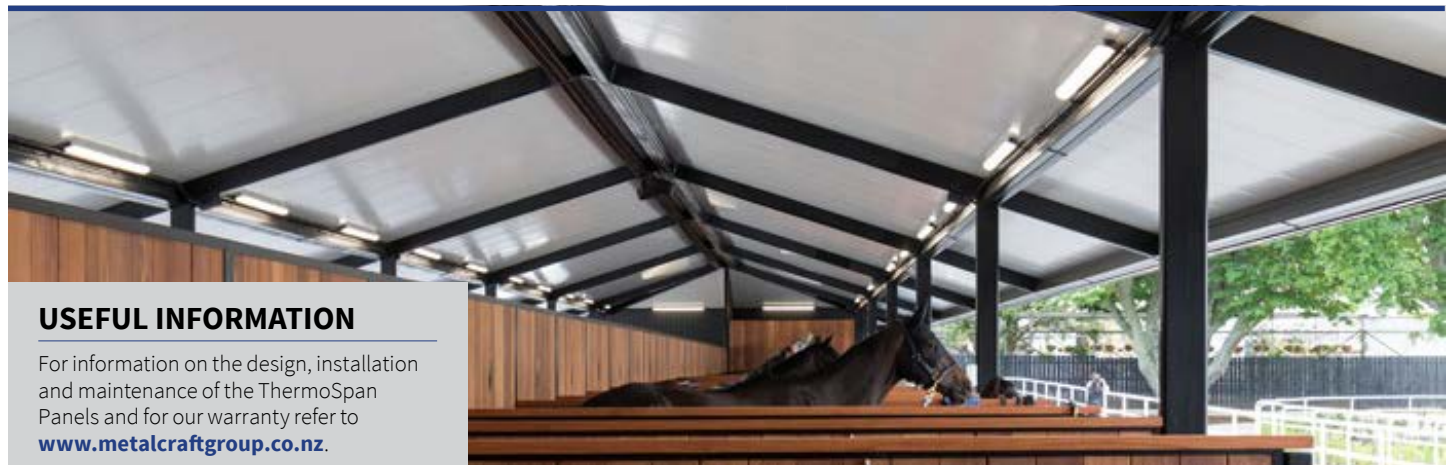

USEFUL INFORMATION

For information on the design, installation and maintenance of the ThermoSpan Panels and for our warranty refer to www.metalcraftgroup.co.nz.

PERFORMANCE CLAIMS

If designed, installed and maintained in accordance with all Metalcraft Insulated Panel Systems requirements, the ThermoSpan Panels will comply with or contribute to compliance with the following performance claims:

NZ Building Code clauses	BASIS OF COMPLIANCE	
	Compliance statement ¹	Demonstrated by
B1 Structure B1.3.1, B1.3.2, B1.3.3 (a), (b), (c), (e), (f), (g), (i), (j), (l), (m), (q), B1.3.4 (a), (b), (c), (d), (e)	ALTERNATIVE SOLUTION	<ul style="list-style-type: none"> ➤ Evaluation by Global-Mark for Product Certification, Metalcraft Insulated Panel System Certificate of Conformity GM-CM30078-RevC, issued by Global-Mark [Global-Mark, 05/02/2020]. ➤ Loadspan capacities for permissible wind pressure up to 4.3 kPa [Metalcraft Insulated Panels, July 2020].
B2 Durability B2.3.1 (a)	ALTERNATIVE SOLUTION	<ul style="list-style-type: none"> ➤ Evaluation by Global-Mark for Product Certification, Metalcraft Insulated Panel System Certificate of Conformity GM-CM30078-RevC, issued by Global-Mark [Global-Mark, 05/02/2020].
C3 Fire affecting areas beyond the fire source C3.4 (a)	ALTERNATIVE SOLUTION	<ul style="list-style-type: none"> ➤ Evaluation by Global-Mark for Product Certification, Metalcraft Insulated Panel System Certificate of Conformity GM-CM30078-RevC, issued by Global-Mark [Global-Mark, 05/02/2020].
E2 External moisture E2.3.1, E2.3.2, E2.3.7 (b), (c)	ALTERNATIVE SOLUTION	<ul style="list-style-type: none"> ➤ Evaluation by Global-Mark for Product Certification, Metalcraft Insulated Panel System Certificate of Conformity GM-CM30078-RevC, issued by Global-Mark [Global-Mark, 05/02/2020].
E3 Internal moisture E3.3.1	ALTERNATIVE SOLUTION	<ul style="list-style-type: none"> ➤ Evaluation by Global-Mark for Product Certification, Metalcraft Insulated Panel System Certificate of Conformity GM-CM30078-RevC, issued by Global-Mark [Global-Mark, 05/02/2020].
F2 Hazardous building materials F2.3.1	ALTERNATIVE SOLUTION	<ul style="list-style-type: none"> ➤ Evaluation by Global-Mark for Product Certification, Metalcraft Insulated Panel System Certificate of Conformity GM-CM30078-RevC, issued by Global-Mark [Global-Mark, 05/02/2020].
H1 Thermal efficiency H1.3.1 (a), (b), H1.3.2E, H1.3.3 (c), (e)	ALTERNATIVE SOLUTION	<ul style="list-style-type: none"> ➤ Evaluation by Global-Mark for Product Certification, Metalcraft Insulated Panel System Certificate of Conformity GM-CM30078-RevC, issued by Global-Mark [Global-Mark, 05/02/2020].

1. The Compliance Statement is the pass holder's statement that they have met their obligations under s14G(2) of the Building Act 2004.

Other performance statement	BASIS OF STATEMENT	
	Performance statement	Demonstrated by
ThermoSpan will not contaminate potable water.	AS/NZS 4020:2005	<ul style="list-style-type: none"> ➤ Claimed by manufacturer: New Zealand Steel. ➤ Refer to the BRANZ statement that metal roof is suitable: www.level.org.nz/water/water-supply/mains-or-rainwater

SOURCES OF INFORMATION

- Global-Mark. [05/02/2020] *Metalcraft Insulated Panel System Certificate of Conformity*. GM-CM30078-RevC. Retrieved from <https://www.building.govt.nz/assets/Uploads/building-code-compliance/certifications-programmes/product-certification-scheme/product-certificate-register/metalcraft-insulated-panel-system.pdf>. [Accessed on 06/05/2021].
- Metalcraft Insulated Panels. [July 2020] *ThermoSpan Brochure Version July 2020*. Retrieved from <https://www.metalcraftgroup.co.nz/technical-resources/technical-downloads/product?productId=1225&shownDetail#>. [Accessed on 06/05/2021].

VERSION:

.....

Note: Uncontrolled in printed format.

DATE:

.....

Signed on behalf of Metalcraft Insulated Panels:

NAME:

.....

Peter Zeeman

POSITION:

.....

Manager

By signing this pass™ the signatory confirms that, in respect of the subject of this pass™, the company has met their s14G obligations under the Building Act 2004.



139 Roscommon Road, Wiri, Auckland > peter.z@metpanels.co.nz > +64 9 277 8844 > www.metalcraftgroup.co.nz